


An ISO 9001:2015 Certified Co.



**VISION TECH<sup>®</sup>**  
**ELECTRONICS**



## **PARAMETERS/TECHNICAL SPECIFICATIONS OF ELECTRONIC BALLAST FOR 2XTL 60W(FLEXO PRINT) LAMP (FOR MODEL:UV3-TL 60W/10-R SLV/25,G13- PHILIPS)**


### **MODEL DESCRIPTION:**

Ballast Body Type: UV5

LAMP:TL 60W/10-R SLV/25

Cap: G13


LAMP MAKE: PH (PHILIPS)

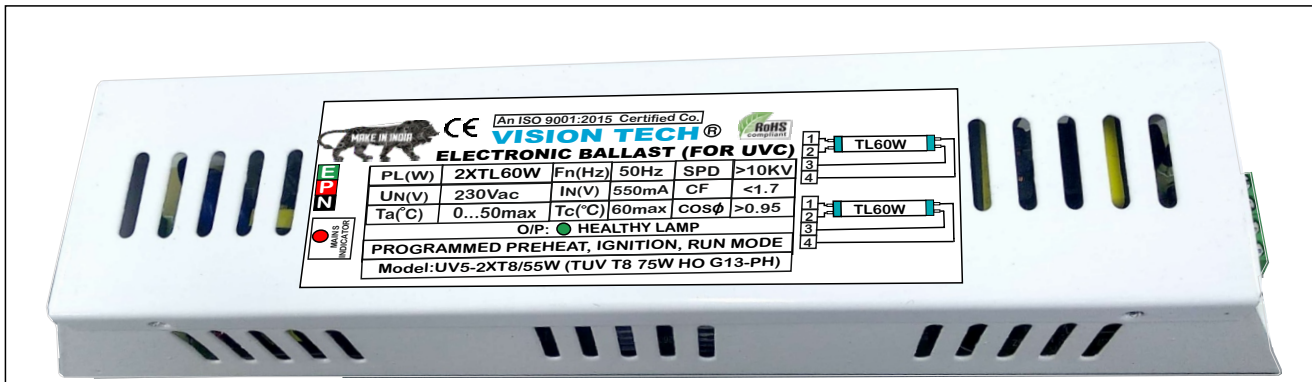

UV5: Dim. : LxBxH = 278mm x 55mm x 42mm


### **TECHNICAL SPECIFICATIONS:**

- TYPE: UV ELECTRONIC BALLAST/INDUSTRIAL FOR 2XTL 60W/10-R SLV/25, G13
- BALLAST CONTROLLER IC IS PROGRAMMED TO PROVIDE AUTO PREHEAT, IGNITION & RUN MODE, WHICH ENSURES THE ENHANCED LIFE SPAN OF LAMP/TUBE
- OPERATING VOLTAGE RANGE:  $U_n = 170\text{Vac} - 300\text{Vac}$
- MAINS RATED VOLTAGE:  $V=230\text{Vac}$
- MAINS FREQUENCY: $F_n(\text{Hz})=50\text{Hz}$
- MAINS I/P CURRENT:  $I_n=550\text{mA}$
- WATTAGE: 120W
- POWER FACTOR:  $PF > 0.95$
- SURGE PROTECTION DEVICE:  $SPD > 10\text{KV}$
- CREST FACTOR:  $CF > 1.70$
- AMBIENT TEMPERATURE:  $T_a=0...50^\circ\text{C}(\text{max})$ , CASE TEMPERATURE:  $T_c=60^\circ\text{C}(\text{max})$
- IN RUSH CURRENT PROTECTION, RFI/EMI PROTECTION

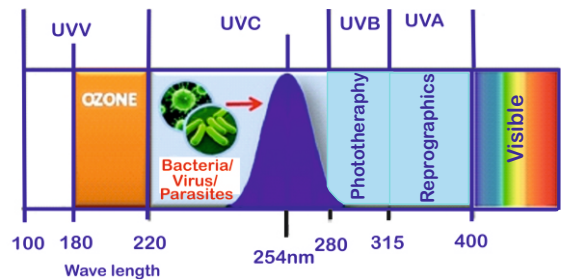

### **FEATURES:**

- SLIM DESIGN
- BODY:METALLIC POWDER COATED
- MAINS LED INDICATOR:RED
- O/P GREEN LED INDICATORS SIGNIFY HEALTHY LAMPS/TUBES



**\*Due to continuous R&D, design can be changed without prior notification**

**\*Special Requirements will be entertained**

### **WORKS/FACORY ADDRESS:**

VISION TECH ELECTRONICS

C/9, Bansidher Estate, Bardolepura,opp. Suprabhat Industrial Estate,

O/S Dariyapur Darwaja, Ahmedabad-380004, Gujarat, INDIA

M: 9925799688, E-mail Id: info@visiontechproducts.com,mukesh@visiontechproducts.com

Web Sites: www.uvballasts.com, www.visiontechproducts.com

www.vision-techs.com, www.visiontechled.com