


An ISO 9001:2015 Certified Co.




VISION TECH[®]
ELECTRONICS




PARAMETERS/TECHNICAL SPECIFICATIONS OF ELECTRONIC BALLAST FOR TL25W (UVC GERMICIDAL) LAMP (FOR MODEL: UV2-TUV TL Mini 25W 4P SE-PH)

MODEL DESCRIPTION:

Ballast Body Type: UV2
LAMP:TUV TL Mini 25W
Cap: 4P-SE (FOUR PINS, SINGLE ENDED)
Make: PH (PHILIPS)



UV1: Dim. : LxBxH = 97mm x 46mm x 29mm

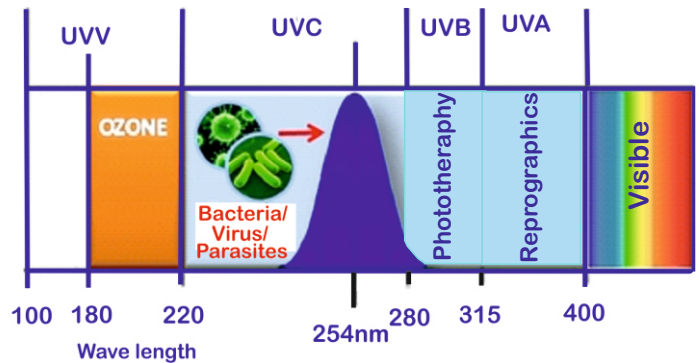

TECHNICAL SPECIFICATIONS:

- TYPE: UV ELECTRONIC BALLAST/INDUSTRIAL
- OPERATING VOLTAGE RANGE: $U_n = 170Vac - 300Vac$
- MAINS RATED VOLTAGE: $V=230Vac$
- MAINS FREQUENCY: $F_n(Hz)=50Hz$
- MAINS I/P CURRENT: $I_n=120mA$
- WATTAGE: 25W
- POWER FACTOR: $PF > 0.92$
- SURGE PROTECTION DEVICE: $SPD > 4KV$
- CREST FACTOR: $CF < 1.70$
- TOLERANCE: $\pm 5\%$
- IN RUSH CURRENT PROTECTION
- RFI/EMI PROTECTION
- O/P DUAL LED:
 - WHEN INDICATOR IS ORANGE, SIGNIFIES HEALTHY TUBE/LAMP
 - WHEN INDICATOR IS RED, SIGNIFIES UNHEALTHY TUBE/LAMP

***Due to continuous R&D, design can be changed without prior notification**

***Special Requirements will be entertained**

WORKS/FACORY ADDRESS:

VISION TECH ELECTRONICS

C/9, Bansidher Estate, Bardolepura, opp. Suprabhat Industrial Estate,
O/S Dariyapur Gate, Ahmedabad-380004, Gujarat, India

M: 9925799688, E-mail Id: info@visiontechproducts.com, mukesh@visiontechproducts.com

Web Sites: www.uvballasts.com, www.visiontechproducts.com
www.vision-techs.com, www.visiontechled.com