

An ISO 9001:2015 Certified Co.



VISION TECH[®]
ELECTRONICS



**PARAMETERS/TECHNICAL SPECIFICATIONS OF ELECTRONIC BALLAST FOR
35W, Compact Quartz Glass High Power HO UVC Germicidal Lamp**

(FOR MODEL: UV2-LTCQ 35W/HO 2G11 36W)


MODEL DESCRIPTION:

Ballast Body Type: UV2

LAMP: 36W, Compact Quartz Glass Germicidal Lamp

Cap: 2G11


Make: LIGHT SOURCES

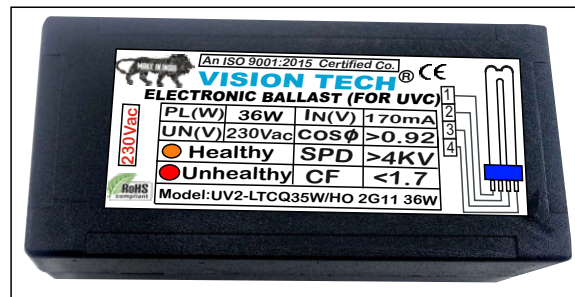

UV2: Dim. : LxBxH = 97mm x 46mm x 29mm

TECHNICAL SPECIFICATIONS:

- TYPE: COMPACT UVC ELECTRONIC BALLAST/INDUSTRIAL
- OPERATING VOLTAGE RANGE: $U_n = 170V_{ac} - 300V_{ac}$
- MAINS RATED VOLTAGE: $V=230V_{ac}$
- MAINS I/P CURRENT: $I_N=170mA$
- WATTAGE: 36W
- POWER FACTOR: $PF > 0.92$
- SURGE PROTECTION DEVICE: $SPD > 4KV$
- CREST FACTOR: $CF < 1.70$
- TOLERANCE: $\pm 5\%$
- IN RUSH CURRENT PROTECTION
- RFI/EMI PROTECTION
- O/P DUAL LED:
- .WHEN INDICATOR IS ORANGE, SIGNIFIES HEALTHY TUBE/LAMP
- .WHEN INDICATOR IS RED, SIGNIFIES UNHEALTHY TUBE/LAMP

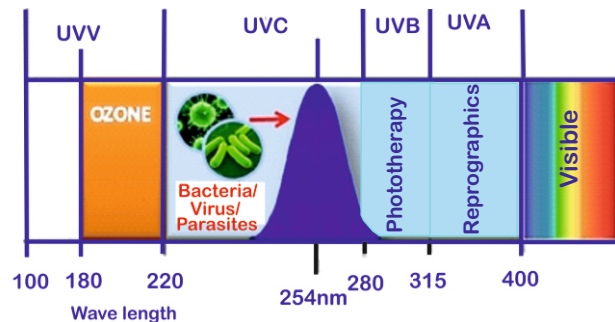

***Due to continuous R&D, design can be changed without prior notification**

***Special Requirements will be entertained**

WORKS/FACORY ADDRESS:

VISION TECH ELECTRONICS

C/9, Bansidher Estate, Bardolepura, opp. Suprabhat Industrial Estate,
O/S Dariyapur Gate, Ahmedabad-380004, Gujarat, India

M: 9925799688, E-mail Id: info@visiontechproducts.com, mukesh@visiontechproducts.com

Web Sites: www.uvballasts.com, www.visiontechproducts.com
www.vision-techs.com, www.visiontechled.com