


An ISO 9001:2015 Certified Co.



VISION TECH[®]
ELECTRONICS



PARAMETERS/TECHNICAL SPECIFICATIONS OF ELECTRONIC BALLAST FOR 24W/UVA TUBE/LAMP (FOR MODEL: UV2-24W/2G11-CBLB-SD)

MODEL DESCRIPTION:


Ballast Body Type: UV2

Tube: 24W

Cap: 2G11

Application: CBLB (Compact Black Light Blue Lamp, UVA)

Make: SD (Sankyo Denki)

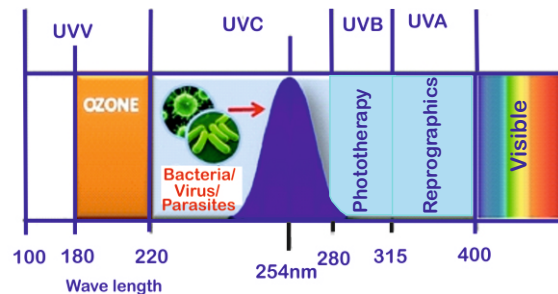

UV2: Dim. : LxBxH = 97mm x 46mm x 29mm

TECHNICAL SPECIFICATIONS:

- TYPE: UV ELECTRONIC BALLAST/INDUSTRIAL
- OPERATING VOLTAGE RANGE: $U_n = 170\text{Vac} - 300\text{Vac}$
- MAINS RATED VOLTAGE: $V=230\text{Vac}$
- MAINS RATED FREQUENCY: $F_n=50\text{Hz}$
- MAINS I/P CURRENT: $I_n=115\text{mA}$
- WATTAGE: 24W
- POWER FACTOR: $PF > 0.90$
- SURGE PROTECTION DEVICE: $SPD > 4\text{KV}$
- CREST FACTOR: $CF < 1.70$
- TOLERANCE: $\pm 5\%$
- IN RUSH CURRENT PROTECTION
- RFI/EMI PROTECTION
- O/P DUAL LED:
 - WHEN INDICATOR IS ORANGE, SIGNIFIES HEALTHY TUBE/LAMP
 - WHEN INDICATOR IS RED, SIGNIFIES UNHEALTHY TUBE/LAMP

***Due to continuous R&D, design can be changed without prior notification**

***Special Requirements will be entertained**

WORKS/FACORY ADDRESS:

VISION TECH ELECTRONICS

C/9, Bansidher Estate, Bardolepura, opp. Suprabhat Industrial Estate,

O/S Dariyapur Gate, Ahmedabad-380004, Gujarat, India

M: 9925799688, E-mail Id: info@visiontechproducts.com, mukesh@visiontechproducts.com

Web Sites: www.uvballasts.com, www.visiontechproducts.com

www.vision-techs.com, www.visiontechled.com