




VISION TECH[®]
ELECTRONICS

PARAMETERS/TECHNICAL SPECIFICATIONS OF ELECTRONIC BALLAST FOR TL 80W (FLEXO PRINT) LAMP (FOR MODEL:UV4-TL 80W/10-R SLV/25 G13, PHILIPS)

MODEL DESCRIPTION:



Ballast Body Type: UV4
LAMP: TL 80W/10-R SLV 25
Cap: G13
LAMP MAKE: PH (PHILIPS)

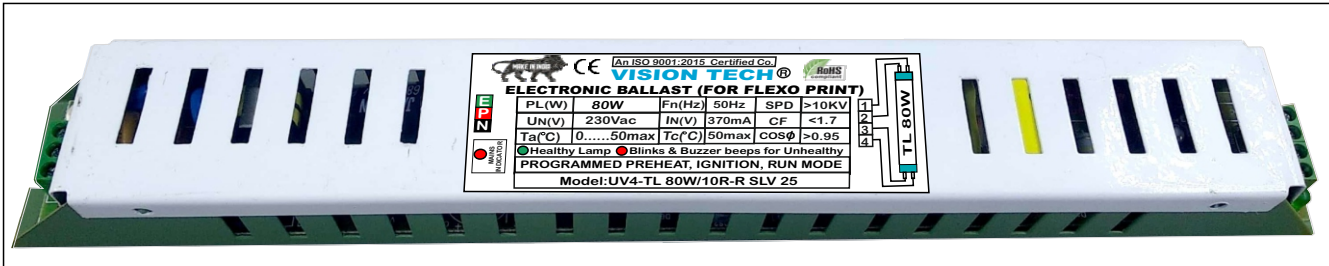

UV4: Dim. : LxBxH = 320mm x 40mm x 35mm

TECHNICAL SPECIFICATIONS:

- TYPE: UV ELECTRONIC BALLAST/INDUSTRIAL FOR TL 80W/10-R SLV/25, G13
- BALLAST CONTROLLER IC IS PROGRAMMED TO PROVIDE AUTO PREHEAT, IGNITION & RUN MODE, WHICH ENSURES THE ENHANCED LIFE SPAN OF LAMP/TUBE
- OPERATING VOLTAGE RANGE: Un = 170Vac - 300Vac
- MAINS RATED VOLTAGE: V=230Vac
- MAINS FREQUENCY:Fn(Hz)=50Hz
- MAINS I/P CURRENT: In=370mA
- WATTAGE: 80W
- POWER FACTOR: PF > 0.95
- SURGE PROTECTION DEVICE: SPD > 10KV
- CREST FACTOR: CF>1.70
- AMBIENT TEMPERATURE: Ta=0...50°C(max)
- TOLERANCE: ± 5%
- CASE TEMPERATURE: Tc=50°C(max)
- IN RUSH CURRENT PROTECTION
- RFI/EMI PROTECTION

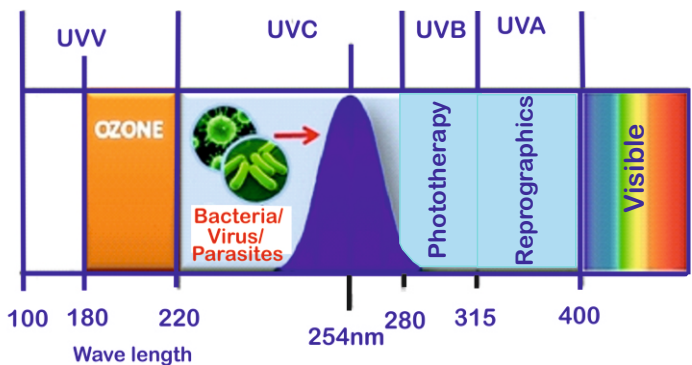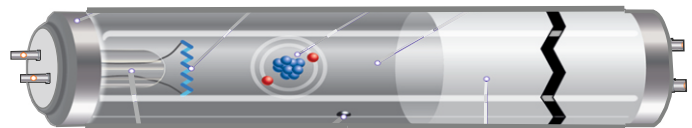

FEATURES:

- SLIM DESIGN
- BODY:METALLIC POWDER COATED
- MAINS LED INDICATOR:RED
- O/P GREEN LED INDICATOR SIGNIFIES HEALTHY LAMP/TUBE
- O/P RED INDICATOR BLINKS WHEN LAMP/TUBE IS UNHEALTHY
- O/P BUZZER BEEPS WHEN LAMP/TUBE IS UNHEALTHY

***Due to continuous R&D, design can be changed without prior notification**

***Special Requirements will be entertained**

WORKS/FACORY ADDRESS:

VISION TECH ELECTRONICS

C/9, Bansidher Estate, Bardolepura,opp. Suprabhat Industrial Estate,

O/S Dariyapur Darwaja, Ahmedabad-380004, Gujarat, INDIA

M: 9925799688, E-mail Id: info@visiontechproducts.com,mukesh@visiontechproducts.com

Web Sites: www.uvballasts.com, www.visiontechproducts.com

www.vision-techs.com, www.visiontechled.com