




PARAMETERS/TECHNICAL SPECIFICATIONS OF ELECTRONIC BALLAST FOR TL/100W (NARROWBAND UVB) LAMP (FOR MODEL: UV4-TL 100W/01-RDC/R17d-PH)

MODEL DESCRIPTION:



Ballast Body Type: UV4
 LAMP: TL/100W/01 (NARROWBAND UVB)
 Cap: RDC (R17d)
 LAMP MAKE: PH (PHILIPS)

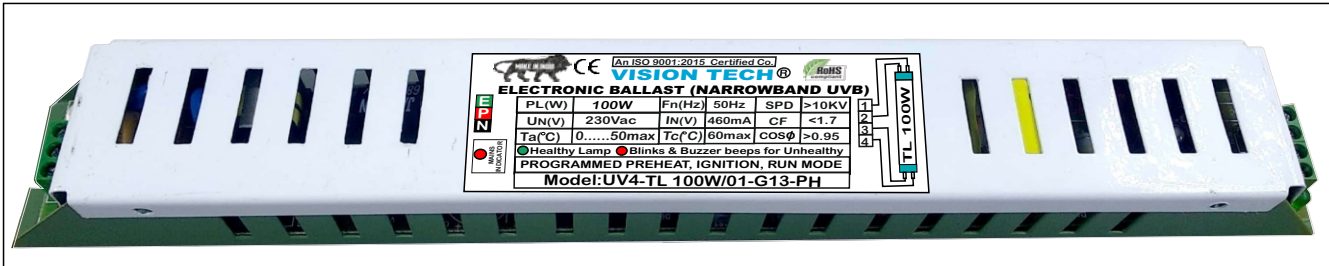

UV4: Dim. : LxBxH = 320mm x 40mm x 35mm

TECHNICAL SPECIFICATIONS:

- TYPE: UV ELECTRONIC BALLAST/INDUSTRIAL FOR TL/100W/01, RDC/R17d
- BALLAST CONTROLLER IC IS PROGRAMMED TO PROVIDE AUTO PREHEAT, IGNITION & RUN MODE, WHICH ENSURES THE ENHANCED LIFE SPAN OF LAMP/TUBE
- OPERATING VOLTAGE RANGE: $U_n = 170V_{ac} - 300V_{ac}$
- MAINS RATED VOLTAGE: $V=230V_{ac}$
- MAINS FREQUENCY: $F_n(Hz)=50Hz$
- MAINS I/P CURRENT: $I_n=460mA$
- WATTAGE: 100W
- POWER FACTOR: $PF > 0.95$
- SURGE PROTECTION DEVICE: $SPD > 10KV$
- CREST FACTOR: $CF > 1.70$
- AMBIENT TEMPERATURE: $T_a=0...50^{\circ}C(max)$
- CASE TEMPERATURE: $T_c=60^{\circ}C(max)$
- TOLERANCE: $\pm 5\%$
- IN RUSH CURRENT PROTECTION
- RFI/EMI PROTECTION

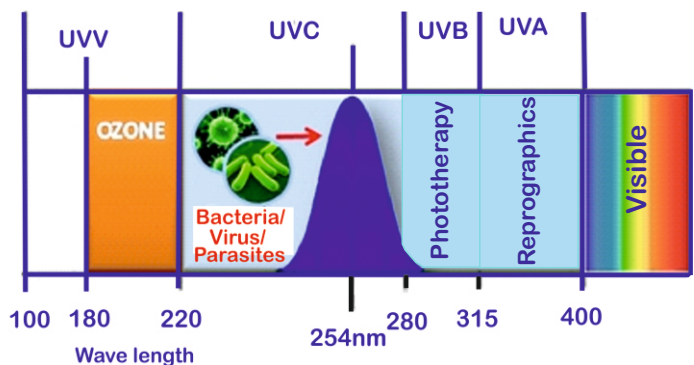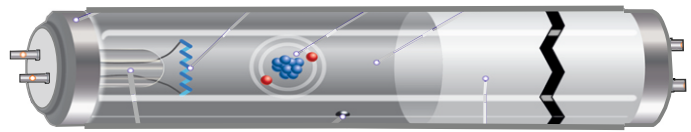

FEATURES:

- SLIM DESIGN
- BODY: METALLIC POWDER COATED
- MAINS LED INDICATOR: RED
- O/P GREEN LED INDICATOR SIGNIFIES HEALTHY LAMP/TUBE
- O/P RED INDICATOR BLINKS WHEN LAMP/TUBE IS UNHEALTHY
- O/P BUZZER BEEPS WHEN LAMP/TUBE IS UNHEALTHY

***Due to continuous R&D, design can be changed without prior notification**

***Special Requirements will be entertained**

WORKS/FACORY ADDRESS:

VISION TECH ELECTRONICS

C/9, Bansidher Estate, Bardolepura, opp. Suprabhat Industrial Estate,

O/S Dariyapur Darwaja, Ahmedabad-380004, Gujarat, India

M: 9925799688, E-mail Id: info@visiontechproducts.com, mukesh@visiontechproducts.com

Web Sites: www.uvballasts.com, www.visiontechproducts.com

www.vision-techs.com, www.visiontechled.com